


Orizzo 2

Fixed modular heated towel rail
 WITH BRASS BAR WASHERS.
 PIPE DIMENSION: Ø25mm/Ø50mm
 ADDITIONAL MODULE: 150mm
 COMBINED VERSION: not available
 SINGLE TUBE VERSION: not available
 FLOOR CONNECTION: not available
 STANDARD CONNECTION: union 1/2 M with
 eccentric
 AROMATHERAPY: not available
 SWAROVSKI HANDLES: available

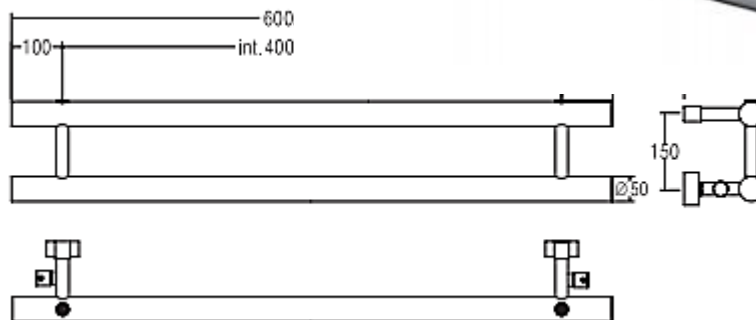

ΔT Euronorm 442
 (Trattamento galvanico)
 Galvanic treatment
 Гальваническое покрытие

ΔT Euronorm 442
 (Trattamento galvanico +
 Verniciatura)
 Galvanic treatment +
 Varnished
 Гальваническое покрытие +
 покраска

ΔT Euronorm 442
 (Verniciatura)
 Varnished
 Покраска


ΔT riscaldamento a bassa temperatura
 ΔT low temperature heating system
 ΔT низкотемпературное отопление

INT. (mm)	ΔT50°C (TG)			ΔT50°C (TG+V)			ΔT50°C (V)			watt	ΔT30°C (TG)			WEIGHT
	watt	kcal/h	btu	watt	kcal/h	btu	watt	kcal/h	btu		watt	kcal/h	btu	
400	103	89	352	124	112	446	134	115	458	54	46	182	7,6	
600	137	118	468	164	149	593	178	153	609	71	61	242	7,8	
1.000	206	177	703	247	224	892	268	230	916	107	92	364	10,9	

Orizzo 4

Fixed modular heated towel rail
 WITH BRASS BAR WASHERS.
 PIPE DIMENSION: Ø25mm/Ø50mm
 ADDITIONAL MODULE: 150mm
 COMBINED VERSION: not available
 SINGLE TUBE VERSION: not available
 FLOOR CONNECTION: not available
 STANDARD CONNECTION: union 1/2 M with
 eccentric
 AROMATHERAPY: not available
 SWAROVSKI HANDLES: available



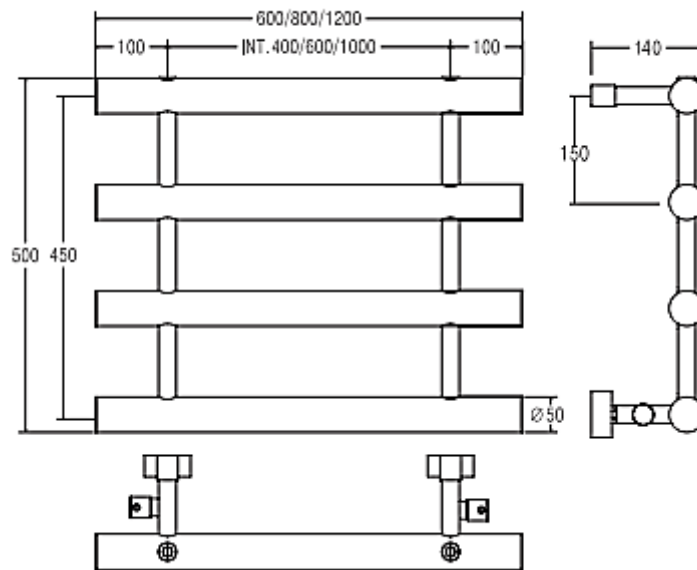

ΔT Euronorm 442
(Trattamento galvanico)
Galvanic treatment
Гальваническое покрытие

ΔT Euronorm 442
(Trattamento galvanico +
Verniciatura)
Galvanic treatment +
Varnished
Гальваническое покрытие +
покраска

ΔT Euronorm 442
(Verniciatura)
Varnished
Покраска


ΔT riscaldamento a bassa temperatura
ΔT low temperature heating system
ΔT низкотемпературное отопление

INT. (mm)	ΔT50°C (TG)			ΔT50°C (TG+V)			ΔT50°C (V)			ΔT30°C (TG)			WEIGHT
	watt	kcal/h	btu	watt	kcal/h	btu	watt	kcal/h	btu	watt	kcal/h	btu	
400	215	185	734	258	234	931	280	240	956	112	96	380	14
600	286	246	977	343	312	1.238	372	320	1.271	149	128	506	16
1.000	430	369	1.468	516	469	1.862	559	481	1.911	224	192	760	20

Orizzo 8

Fixed modular heated towel rail
WITH BRASS BAR WASHERS.
PIPE DIMENSION: Ø25mm/Ø50mm
ADDITIONAL MODULE: 150mm
COMBINED VERSION: not available
SINGLE TUBE VERSION: not available
FLOOR CONNECTION: not available
STANDARD CONNECTION: union 1/2 M with
eccentric
AROMATHERAPY: not available
SWAROVSKI HANDLES: available



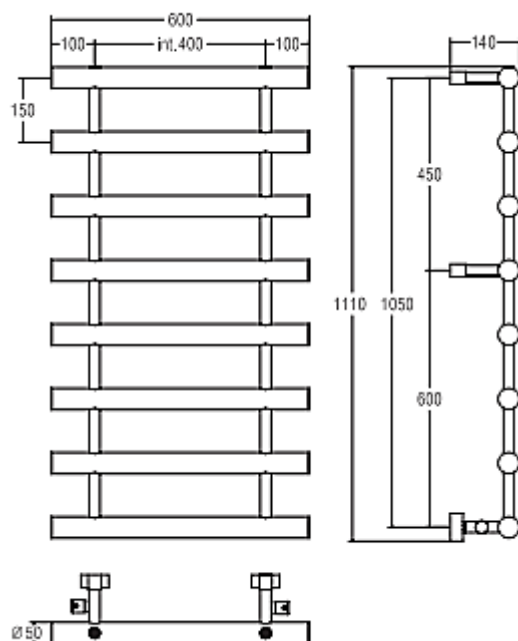

ΔT Euronorm 442
(Trattamento galvanico)
Galvanic treatment
Гальваническое покрытие

ΔT Euronorm 442
(Trattamento galvanico +
Verniciatura)
Galvanic treatment +
Vernished
Гальваническое покрытие +
покраска

ΔT Euronorm 442
(Verniciatura)
Vernished
Покраска

ΔT riscaldamento a bassa temperatura
 ΔT low temperature heating system
 ΔT низкотемпературное отопление

INT. (mm)	$\Delta T 50^{\circ}\text{C}$ (TG)			$\Delta T 50^{\circ}\text{C}$ (TG+V)			$\Delta T 50^{\circ}\text{C}$ (V)			$\Delta T 30^{\circ}\text{C}$ (TG)			WEIGHT
	watt	kcal/h	btu	watt	kcal/h	btu	watt	kcal/h	btu	watt	kcal/h	btu	
400	435	374	1.485	522	474	1.884	566	487	1.933	226	195	769	27